

1.Description


The 3842/43/44/45 are fixed frequency current mode PWM controller. They are specially designed for OFF-Line and DC to DC converter applications with a minimal external components. Internally implemented circuits include a trimmed oscillator for precise duty cycle control, a temperature compensated reference, high gain error amplifier, current sensing comparator, and a high current totempole output ideally suited for driving a power MOSFET. Protection circuitry includes built undervoltage lockout and current limiting. The 3842 and 3844 have UVLO thresholds of 16 V (on) and 10 V (off). The corresponding thresholds for the 3843/45 are 8.4V (on) and 7.6V (off). The 3842) and 3843 can operate within 100% duty cycle. The 3844 and 3845 can operate within 50% duty cycle. The 384X has Start-Up Current 0.5mA (typ).

2.Features

- Low Start-Up and Operating Current
- High Current Totem Pole Output
- Undervoltage Lockout With Hysteresis
- Operating Frequency Up To 500KHz



3.Pinning Information

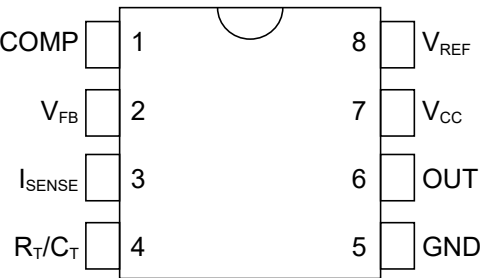


SOP-8

Pin Descriptions

Pin Number	Function	Description
1	COMP	This pin is the Error Amplifier output and is made for loop compensation.
2	V _{FB}	This is the inverting input of the Error Amplifier. It is normally connected to the switching power supply output through a resistor divider.
3	I _{SENSE}	A voltage proportional to inductor current is connected to this input. The PWM uses this information to terminate the output switch conduction.
4	R _T /C _T	The oscillator frequency and maximum Output duty cycle are programmed by connecting resistor R _T to V _{ref} and capacitor C _T to ground.
5	GROUND	This pin is the combined control circuitry and power ground.
6	OUTPUT	This output directly drives the gate of a power MOSFET. Peak currents up to 1A are sourced and sink by this pin.
7	V _{CC}	This pin is the positive supply of the integrated circuit.
8	V _{ref}	This is the reference output. It provides charging current for capacitor C _T through resistor R _T .



4. Block Diagram

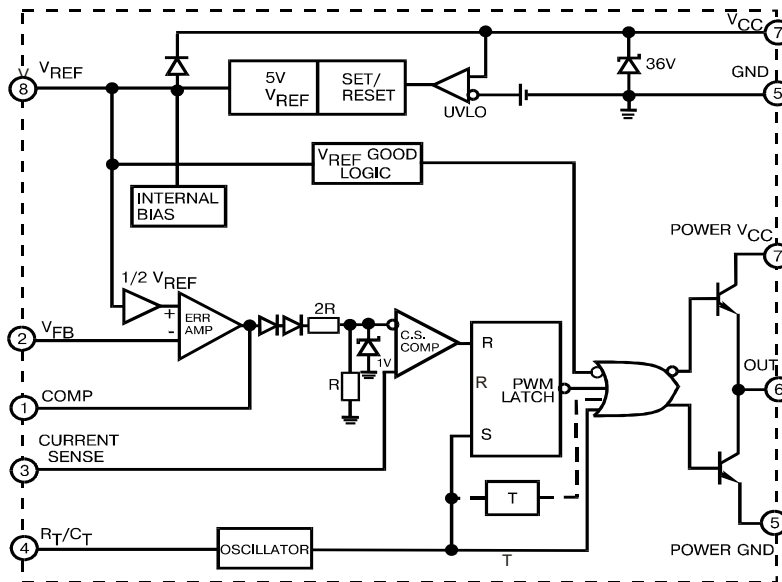

(toggle flip flop used only in 3844, 3845)

5. Absolute Maximum Ratings

Parameter	Symbol	Maximum	Units
Supply Voltage (low impedance source)	V_{CC}	30	V
Output Current	I_O	± 1	A
Input Voltage (Analog Inputs pins 2,3)	V_I	-0.3 to 5.5	V
Error Amp Output Sink Current	$I_{SINK (E.A)}$	10	mA
Power Dissipation ($T_A=25^\circ\text{C}$)	P_D	1	W
Storage Temperature Range	T_{STG}	-65 to 150	$^\circ\text{C}$
Lead Temperature (soldering 5 sec.)	T_L	260	$^\circ\text{C}$
Operating Ambient Temperature	T_A	0 to 70	$^\circ\text{C}$



6. Electrical Characteristics

(* $V_{CC}=15V$, $R_T=10k\Omega$, $C_T=3.3nF$, $T_A=0^\circ C$ to $+70^\circ C$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reference Section						
Reference Output Voltage	V_{REF}	$T_J=25^\circ C$, $I_{REF}=1mA$	4.9	5	5.1	V
Line Regulation	ΔV_{REF}	$12V \leq V_{CC} \leq 25V$		6	20	mV
Load Regulation	ΔV_{REF}	$1mA \leq I_{REF} \leq 20mA$		6	25	mV
Short Circuit Output Current	I_{SC}	$T_A=25^\circ C$		-100	-180	mA
Oscillator Section						
Oscillation Frequency	f	$T_J=25^\circ C$ 384X	47	52	57	KHz
Frequency Change with Voltage	$\Delta f/\Delta V_{CC}$	$12V \leq V_{CC} \leq 25V$		0.05	1	%
Oscillator Amplitude	$V_{(OSC)}$	(peak to peak)		1.6		V
Error Amplifier Section						
Input Bias Current	I_{BIAS}	$V_{FB}=3V$		-0.1	-2	μA
Input Voltage	$V_{I(E.A)}$	$V_{PIN1}=2.5V$	2.42	2.5	2.58	V
Open Loop Voltage Gain	A_{VOL}	$2V \leq V_O \leq 4V$	65	90		dB
Power Supply Rejection Ratio	PSRR	$12V \leq V_{CC} \leq 25V$	60	70		dB
Output Sink Current	I_{SINK}	$V_{PIN2}=2.7V$, $V_{PIN1}=1.1V$	2	7		mA
Output Source Current	I_{SOURCE}	$V_{PIN2}=2.3V$, $V_{PIN1}=5V$	-0.5	-1		mA
High Output Voltage	V_{OH}	$V_{PIN2}=2.3V$, $R_L=15K\Omega$ to GND	5	6		V
Low Output Voltage	V_{OL}	$V_{PIN2}=2.7V$, $R_L=15K\Omega$ to PIN 8		0.8	1.1	V
Current Sense Section						
Gain	G_V	(Note 1 & 2)	2.85	3	3.15	V/V
Maximum input Signal	$V_{I(MAX)}$	$V_{PIN1}=5V$ (Note1)	0.9	1	1.1	V
Supply Voltage Rejection	SVR	$12V \leq V_{CC} \leq 25V$ (Note1)		70		dB
Input Bias Current	I_{BIAS}	$V_{PIN3}=3V$		-3	-10	μA



Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Section						
Low Output Voltage	V _{OL}	I _{SINK} =20mA		0.08	0.4	V
		I _{SINK} =200mA		1.4	2.2	V
High Output Voltage	V _{OH}	I _{SINK} =20mA	13	13.5		V
		I _{SINK} =200mA	12	13		V
Rise Time	t _R	T _J =25°C, C _L =1nF (Note 3)		45	150	nS
Fall Time	t _F	T _J =25°C, C _L =1nF (Note 3)		35	150	nS
Undervoltage Lockout Section						
Start Theshold	V _{TH(ST)}	3842/44	14.5	16	17.5	V
		3843/45	7.8	8.4	9	V
Min. Operating Voltage (After Turn On)	V _{OPR(min)}	3842/44	8.5	10	11.5	V
		3843/45	7	7.6	8.2	V
PWM Section						
Max. Duty Cycle	D _(MAX)	3842/43	95	97	100	%
		3844/45	47	48	50	%
Min. Duty Cycle	D _(MAX)				0	%
Total Standby Current						
Start-Up Curent	I _{ST}	384X		0.5		mA
Operating Supply Current	I _{CC (OPR)}	V _{PIN3} =V _{PIN2} =0V		13	17	mA
Zener Voltage	V _Z	I _{CC} =25mA	30	38		V

* - Adjust V_{CC} above the start threshold before setting it to 15V.

Note 1: Parameter measured at trip point of latch with $V_{PIN2}=0$.

Note 2: Gain defined as $A=\Delta V_{PIN1}/\Delta V_{PIN3}$; $0\leq V_{PIN3}\leq 0.8V$.

Note 3: These parameters, although guaranteed, are not 100% tested in production.



7.Application Information

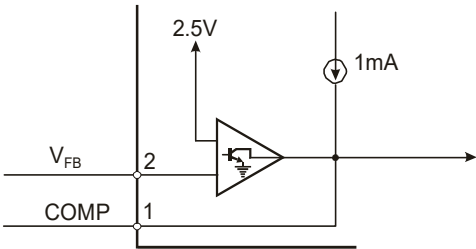


Figure 1. Error Amp Configuration

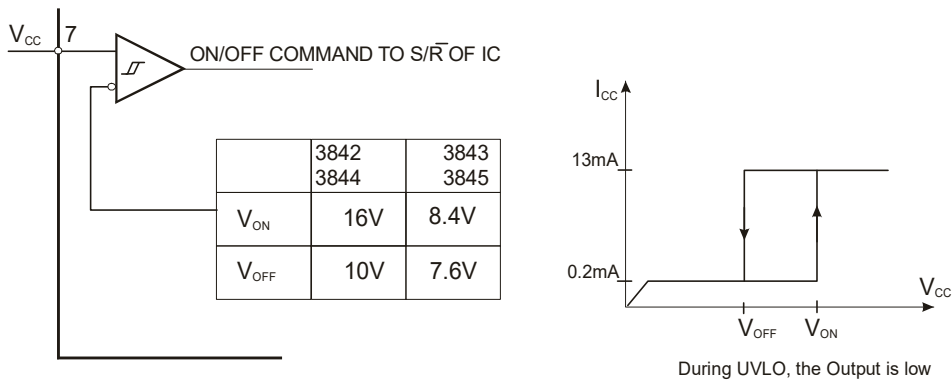


Figure 2. Undervoltage Lockout

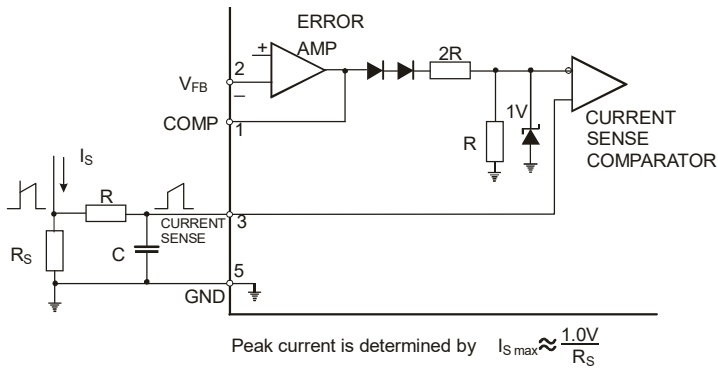


Figure 3. Current Sense Circuit



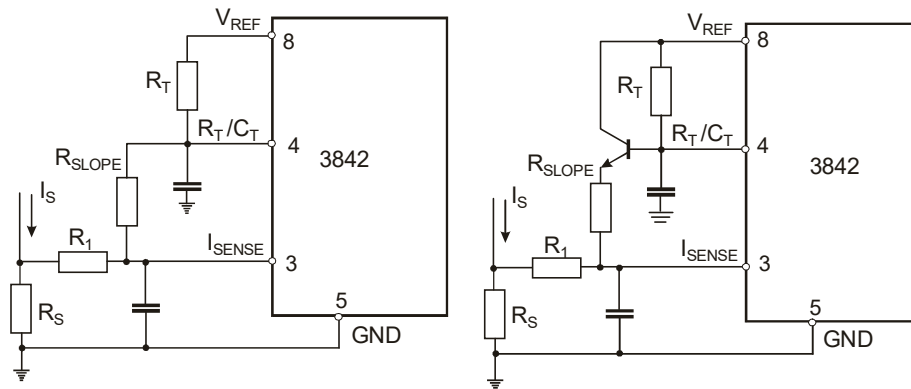


Figure 4. Slope Compensation Techniques

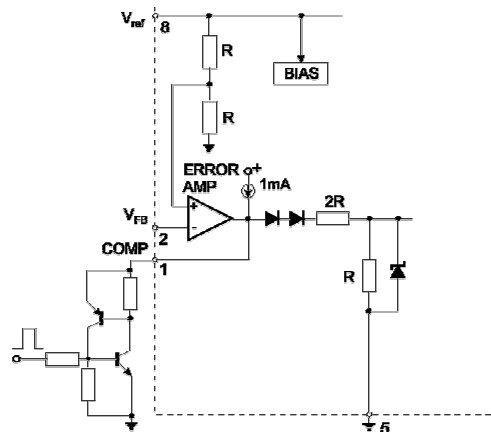


SCR must be selected for a holding current of less than 0.5mA.
The simple two transistor circuit can be used in place of the SCR as shown.

Figure 5. Latched Shutdown

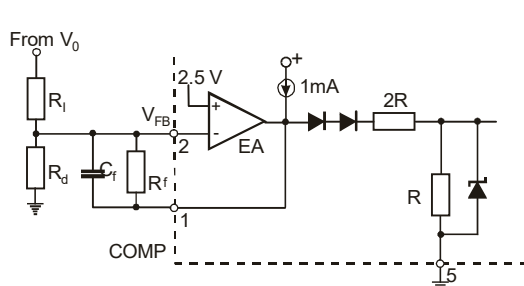

Error Amp compensation circuit for stabilizing any current-mode topology except for boost and flyback converters operating with continuous inductor current.

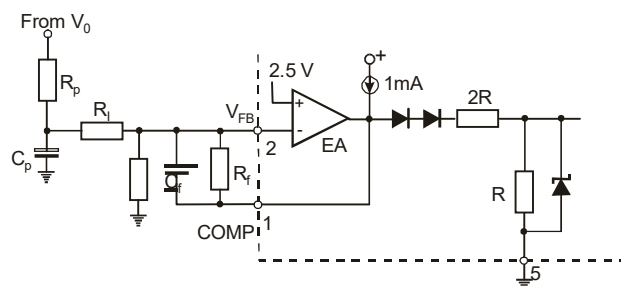

Error Amp compensation circuit for stabilizing current-mode boost and flyback topologies operating with continuous inductor current.

Figure 6. Error Amplifier Compensation

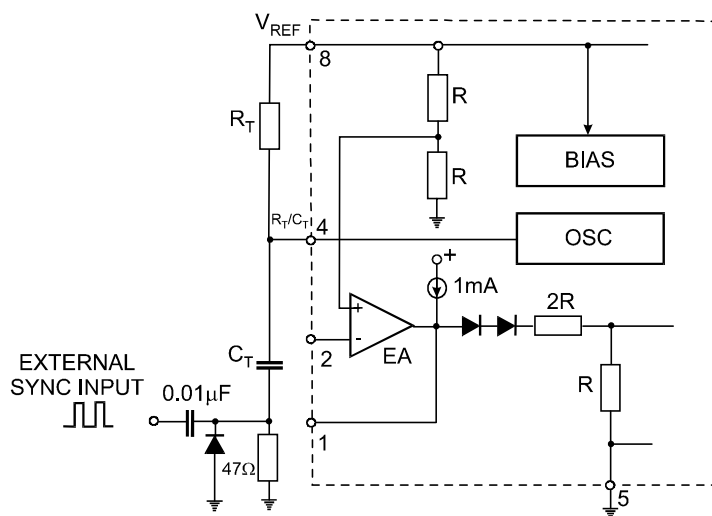


Figure 7. External Clock Synchronization

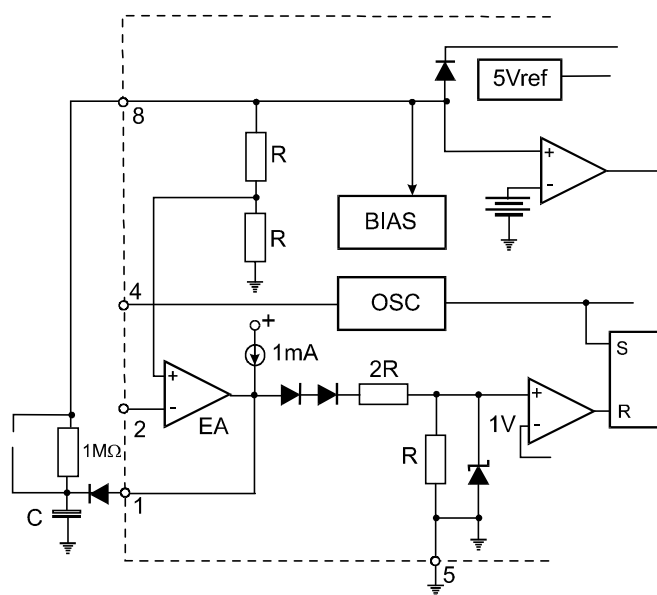


Figure 8. Soft-Start Circuit



8.1 Typical Characteristic

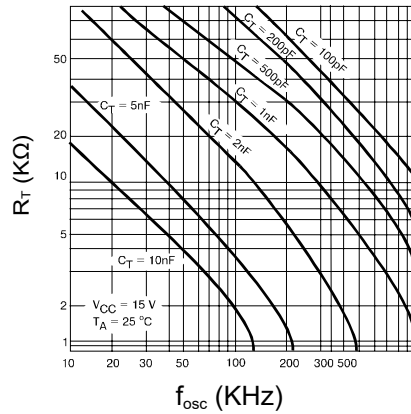


Figure 1: Timing Resistor vs. Oscillator Frequency

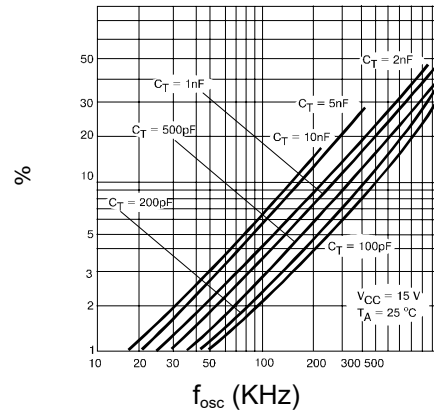


Figure 2: Output Dead-Time vs. Oscillator Frequency

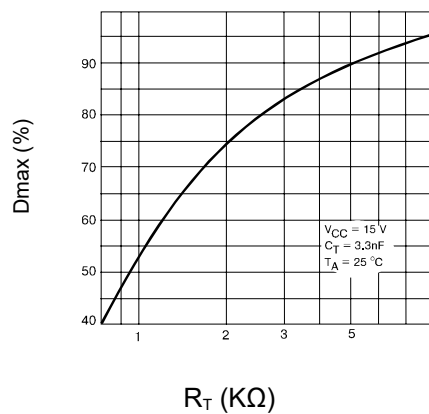


Figure 3: Maximum Output Duty Cycle vs. Timing Resistor (UC3842/43)

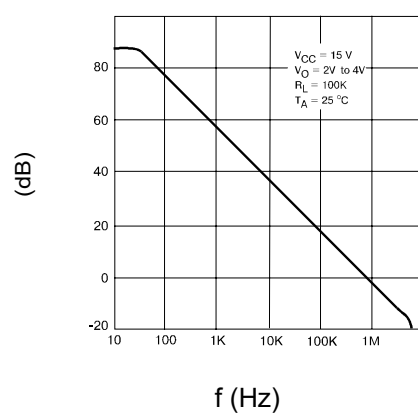


Figure 4: Error Amp Open-Loop Gain vs. Frequency

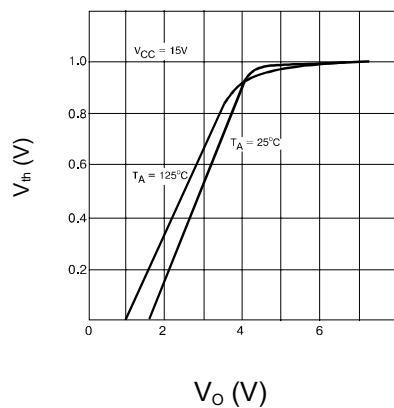


Figure 5: Current Sense Input Threshold vs. Error Amp Output Voltage

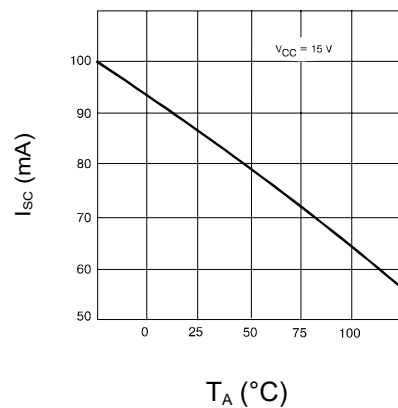


Figure 6: Reference Short Circuit Current vs. Temperature



8.2 Typical Characteristic

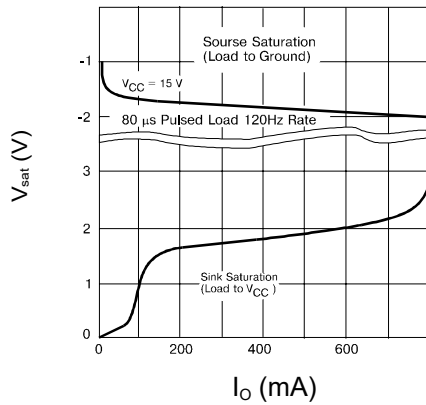


Figure 7: Output Saturation Voltage vs. Load Current
 $T_A = 25^\circ\text{C}$

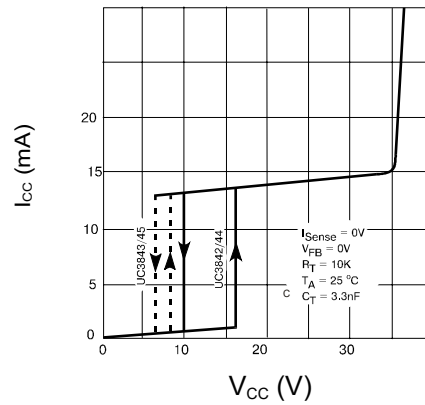


Figure 8: Supply Current vs. Supply Voltage


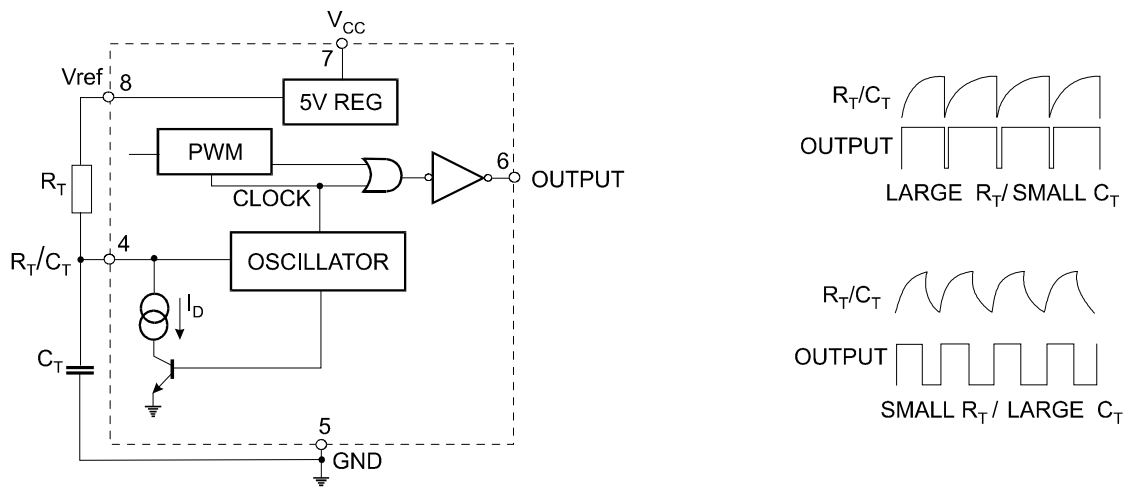


Figure 9. Oscillator and Output Waveforms



9.SOP-8 Package Outline Dimensions

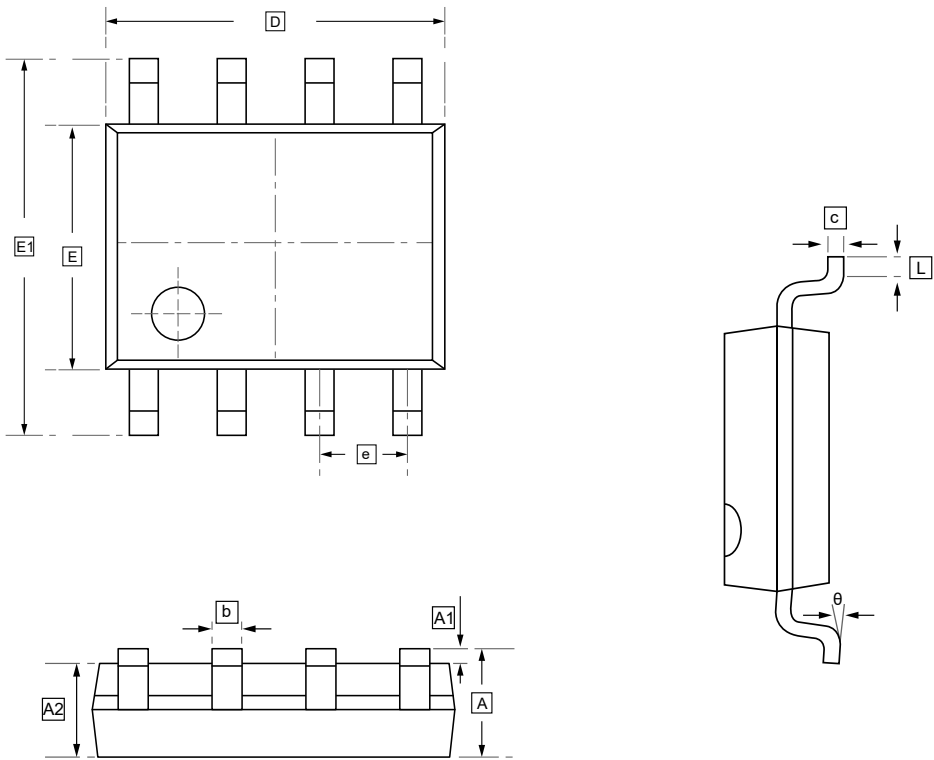


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



10.Ordering Information



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW UC3842B	UC3842B	SOP-8	2500	Tape and reel
UMW UC3843B	UC3843B	SOP-8	2500	Tape and reel
UMW UC3844B	UC3844B	SOP-8	2500	Tape and reel
UMW UC3845B	UC3845B	SOP-8	2500	Tape and reel



11.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.