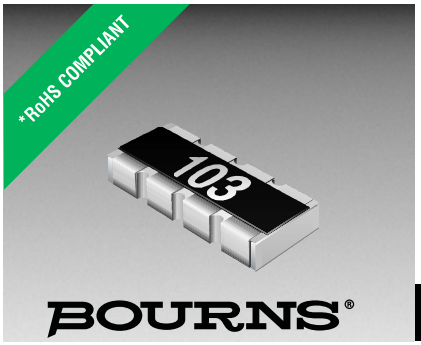


Features

- RoHS compliant*
- Convex and concave terminals
- 2, 4 or 8 isolated elements available
- Resistance tolerance ±1 % and ±5 %
- Resistance range: 10 ohms to 1 megohm

CAT/CAY 16 Series - Chip Resistor Arrays


Specifications

Requirement	Characteristics	Test Method
Short Time Overload	±2 % +0.1 ohm	Rated Voltage X 2.5, 5 seconds
Soldering Heat	±2 % +0.1 ohm	260 °C ±5 °C, 10 seconds ±1 second
Temperature Cycling (5)	±1 % + 0.1 ohm	125 °C (30 minutes) - normal (15 minutes) -55 °C (30 minutes) - normal (15 minutes)
Moisture Load Life	±3 % +0.1 ohm	1000 hours
Load Life	±3 % +0.1 ohm	1000 hours

Characteristics

Characteristics	CAT16/CAY16
Number of Elements	2 (J2), 4 (F4, J4), 8 (F8, J8)
Power Rating Per Resistor @ 70 °C	0.0625 W
Package Power Rating @ 70 °C	0.250 W (0.125 W for J2)
Temperature Coefficient of Resistance	±200 PPM/°C
Resistance Tolerance	±1 %, ±5 %
Resistance Range: E24 (J), E96 + E24 (F) Zero-Ohm Jumper < 0.05 ohm	10 ohms - 1 megohm
Max. Working Voltage	50 V (25 V for CAY16-J8)
Operating Temp. Range	-55 °C - 125 °C

Soldering Profile for RoHS Compliant Chip Resistors and Arrays

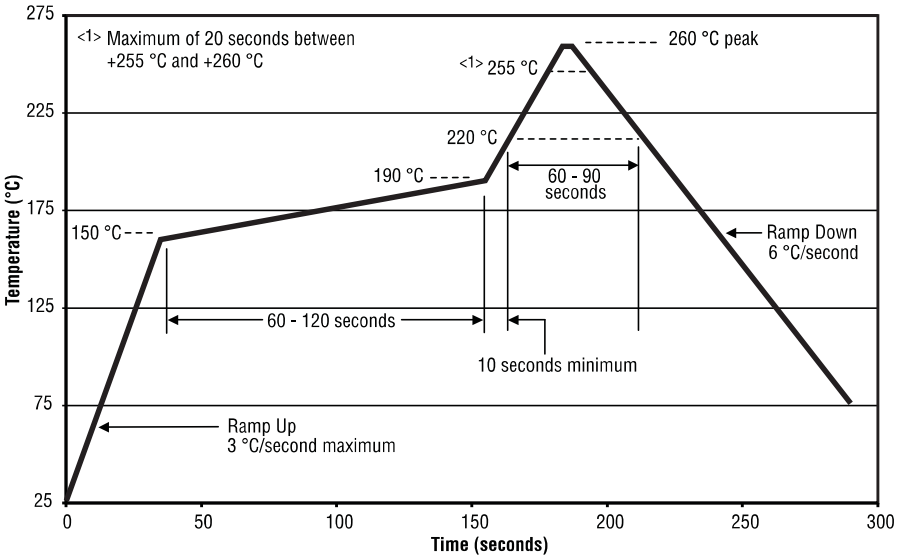

How To Order

CA Y 16 - 103 J 4 LF

Chip Arrays

Type
- CAT16 = Concave Terminations
- CAY16 = Convex Terminations

Resistance Code
- For 1 % Tolerance:

<100 ohms - "R" represents decimal point (example: 24R3 = 24.3 ohms)

≥100 ohms - First three digits are significant, fourth digit represents number of zeros to follow (example: 8252 = 82.5k ohms)

- For 5 % Tolerance:

<10 ohms - "R" represents decimal point (example: 4R7 = 4.7 ohms)

≥10 ohms - First two digits are significant, third digit represents number of zeros to follow (example: 474 = 470k ohms)

- 000 = Zero Ohm Jumper

Resistance Tolerance
- J = ±5 % (2, 4, 8 resistor pkg. and for Zero Ohm Jumper)
- F = ±1 % (4 resistor pkg. and CAT16-F8)

Resistors
- 2 = 2 Isolated Resistors
- 4 = 4 Isolated Resistors
- 8 = 8 Isolated Resistors

Terminations
- LF = Tin-plated (RoHS compliant)


Packaging Size

J2 ..... 0606 Package Size
F4, J4 .... 1206 Package Size
F8 ..... 2406 Package Size for CAT16
J8 ..... 2406 Package Size for CAT16;
1506 Package Size for CAY16

For Standard Values Used in Capacitors, Inductors, and Resistors, click here.


*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.
Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Derating Curve

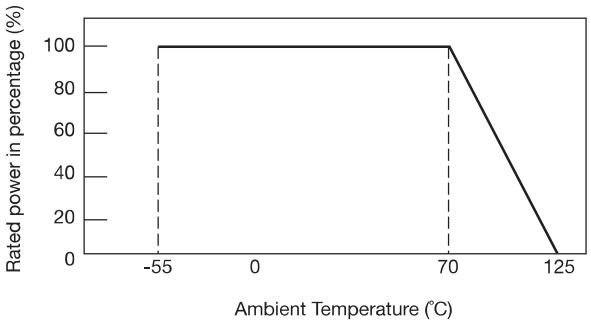


Schematics


CAT16-J2
CAY16-J2



CAT16-F4, -J4
CAY16-F4, -J4



CAT16-F8, -J8
CAY16-J8




Dimensions


Model	A	A'	B	C	D	E	F
CAT16-F4	0.40 ± 0.15 (.016 ± .006)	—	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.10 (.032 ± .004)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.15 (.012 ± .006)
CAT16-J4	0.40 ± 0.15 (.016 ± .006)	—	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.10 (.032 ± ± .004)	1.55 ± 0.25 (.061 ± .0098)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.20 (.012 ± .008)
CAY16-F4, -J4	0.50 ± 0.15 (.002 ± .006)	0.70 ± 0.10 (.027 ± .004)	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.05 (.032 ± .002)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.20 (.012 ± .008)
CAT16-J2	0.40 ± 0.15 (.016 ± .006)	—	1.60 ± 0.15 (.063 ± .006)	0.80 ± 0.05 (.032 ± .002)	1.60 ± 0.15 (.063 ± .006)	0.60 ± 0.15 (.024 ± .006)	0.30 ± 0.20 (.012 ± .008)
CAY16-J2	—	0.60 ± 0.15 (.024 ± .006)	1.60 ± 0.15 (.063 ± .006)	0.76 ± 0.10 (.030 ± .004)	1.60 ± 0.15 (.063 ± .006)	0.45 +0.15/-0.10 (.018 +0.006/-0.004)	0.30 ± 0.20 (.012 ± .008)
CAT16-F8, -J8	0.40 ± 0.15 (.016 ± .006)	—	6.40 ± 0.20 (.252 ± .008)	0.80 ± 0.15 (.032 ± .006)	1.60 ± 0.20 (.063 ± .008)	0.60 ± 0.15 (.024 ± .006)	0.30 ± 0.20 (.012 ± .008)
CAY16-J8	0.30 ± 0.15 (.012 ± .006)	0.30 ± 0.15 (.012 ± .006)	3.80 ± 0.20 (.15 ± .008)	0.50 ± 0.05 (.02 ± .002)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.02 ± .004)	0.30 ± 0.15 (.012 ± .006)

Configurations


CAT16-F4, -J4




CAY16-F4, -J4




CAT16-J2




CAY16-J2







DIMENSIONS: MM / (INCHES)

CAT16-F8, -J8

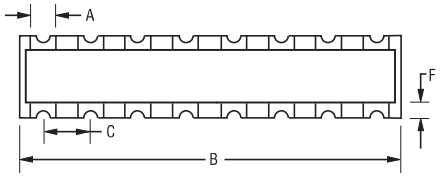

CAY16-J8

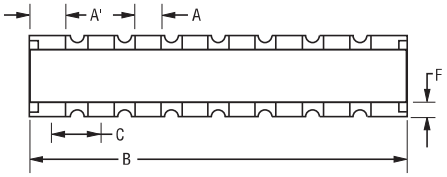





Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Land Patterns


CAT16-F4, -J4, -F8, -J8

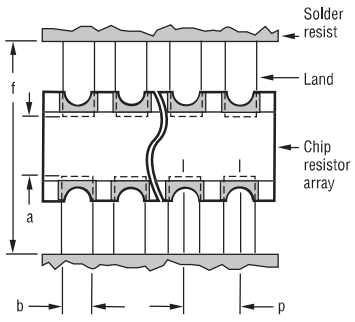


CAY16-F4, -J4, -J8

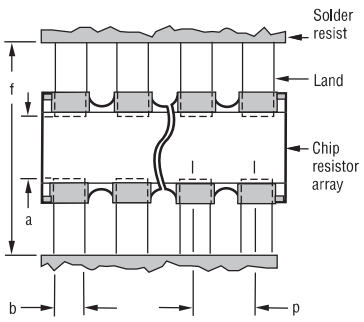

CAT16-J2





CAY16-J2



Model	a	b	p	f
CAT16-F4, -J4, -F8, -J8	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.2 to 2.6 (.087 to .102)
CAY16-F4, -J4	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.4 to 2.8 (.094 to .11)
CAY16-J8	0.7 to 0.9 (.028 to .035)	0.3 to 0.35 (.012 to .014)	0.50 (.020)	2.0 to 2.2 (.079 to .087)
CAT16-J2	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.2 to 2.6 (.087 to .102)
CAY16-J2	0.7 to 0.9 (.028 to .035)	0.4 to 0.5 (.016 to .020)	0.80 (.032)	2.0 to 2.6 (.079 to .102)

Packaging Dimensions

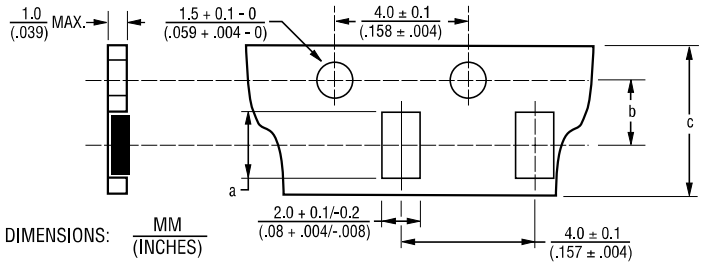

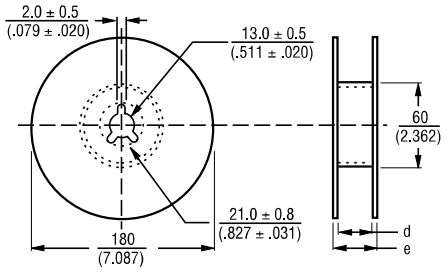

Model	a	b	c	d	e
CAT16-F4, -J4 & CAY16-F4, J4	3.60 ± 0.20 (.142 ± .008)	3.50 ± .005 (.138 ± .004)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)
CAT16-J2 & CAY16-J2	1.80 ± 0.10 (.070 ± .004)	3.50 ± .005 (.138 ± .004)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)
CAT16-F8, -J8	6.90 ± 0.20 (.272 ± .008)	5.50 ± 0.10 (.217 ± .004)	12.0 ± 0.2 (.472 ± .008)	13.0 ± 0.2 (.512 ± .008)	15.4 ± 1.0 (.606 ± .040)
CAY16-J8	4.10 ± 0.15 (.161 ± .012)	3.50 ± 0.05 (.138 ± .002)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)

- 5,000 pcs. per reel (J2, J4, CAY16-J8)
  4,000 pcs. per reel (CAT16-F8, -J8)
- Paper tape

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Legal Disclaimer Notice

BOURNS®

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."

- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.

- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.

- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: https://www.bourns.com/legal/disclaimers-terms-and-policies
PDF: https://www.bourns.com/docs/Legal/disclaimer.pdf