

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023/02/15	NEW DRAWING	



UL&CSA GRADE:
 UL Style.....2651
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 300V
 Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 300V
 Flame Test.....FT1.FT2

Physical Property:
 Stranded Conductor
 AWG Size.....28AWG
 Material of Insulation.....Polyvinyl Chloride(PVC)
 Insulation thickness average.....9 mil

Print: PUYER AWM 2651 28AWG E350147 105°C 300V VW-1 -LF-


Ordering Information

FC 1 2651-28 XX 0305 01

Pitch
1=1.27

No. of Pins
4P~64P

Length
030.5=30.5m/Reel

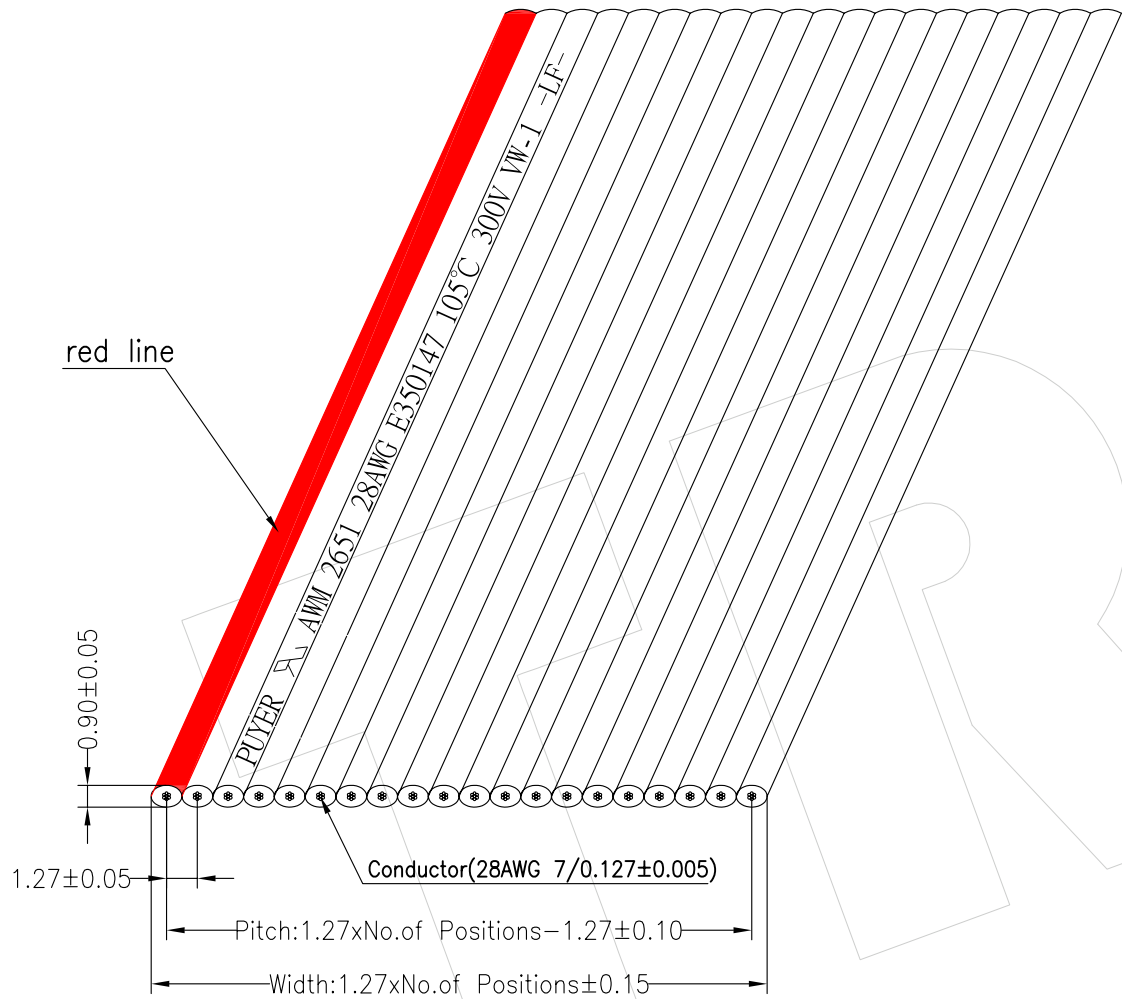

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: 1.27mm Flat Cable AWM2651 28AWG		
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Anna	X.XX	±0.20	SIZE	A4	PART NO.	DOC PART	REVISION
		X.XXX	±0.10			FC 12651-28XX030501	001	A0
APPROVE	Hey	Angle	±3'	THIRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER
		DIM	TOL					1 OF 1