

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	NOV. 18'08
B		MODIFY P/N	MAY. 19'11





■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ WAFER

- Poles : 2 - 14
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1,000 pcs./Bag

Poles	Dimensions(mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

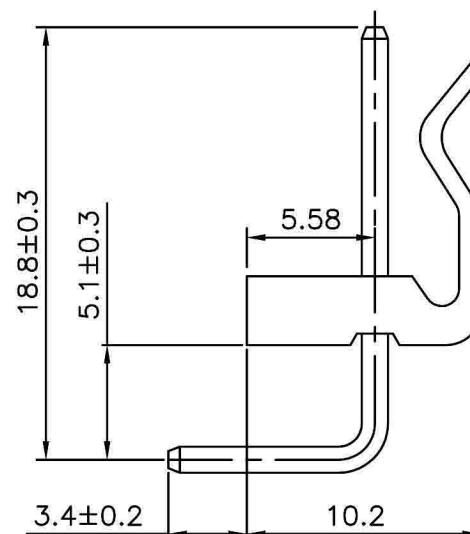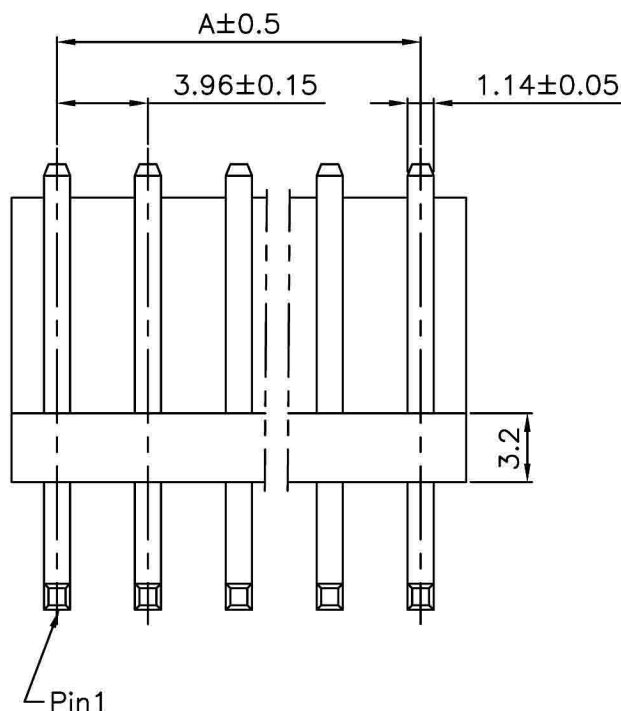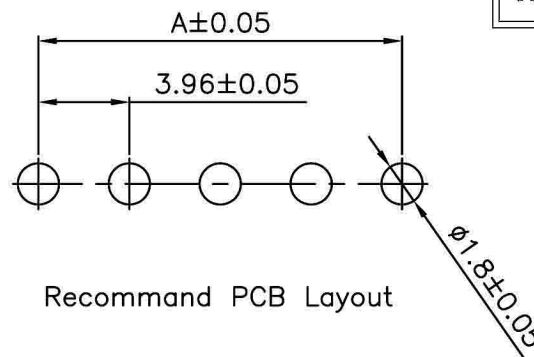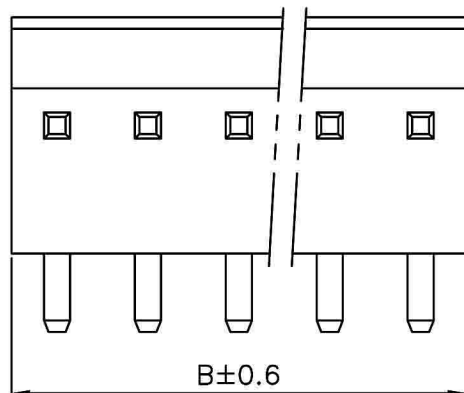

Note:
V=pull out the no. pin.
(拔第 *PIN, 第 1PIN 如圖所示)

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ±	X° ±	
.X ± 0.30	.X° ±	
.XX ± 0.20	.XX° ±	
.XXX±	.XXX° ±	
APPD		
CHKD		
DRAW	Z	MAY. 19'2011

PROJECTION	
UNITS	MM
SCALE	
SIZE	A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
3.96mm Wafer Conn.

PART NO.
4001**RT(-*V)

CAD NO.
F:\PDF\HW\HW-A0002

SHEET
1 OF 1

CPART NO.

圖面編號:GTKSD0873-C(1)